



Republic of the Philippines
DEPARTMENT OF THE INTERIOR AND LOCAL GOVERNMENT
BUREAU OF JAIL MANAGEMENT AND PENOLOGY
NATIONAL HEADQUARTERS

144 Mindanao Avenue, Quezon City 1106
Trunk lines: (+632) 927-5147; 453-1196

Email Address: director@bjmp.gov.ph Website: www.bjmp.gov.ph



BIDS AND AWARDS COMMITTEE

Bid Bulletin No. 1

**NEGOTIATED PROCUREMENT FOR THE
SUPPLY AND DELIVERY OF 163 UNITS OF 9MM PISTOL**
Bid Reference No. G-2016-001

This Bid Bulletin No. 1 is being issued to further clarify, modify and amend items/specifications in the bidding documents in response to clarifications from prospective bidders and to confirm key issues addressed during the Pre-bid Conference on August 4, 2016 for the aforementioned project.

From:

| Lot No | Quantity | Item/Description | Approved Budget for the Contract | Price of Bid Documents | Delivery Period |
|--------|----------|---|----------------------------------|------------------------|-----------------|
| 1 | 163 | SUPPLY AND DELIVERY OF 9mm PISTOLS | Php 4,957,200.00 | 5,000.00 | 45 CD |

To:

| Lot No | Quantity | Item/Description | Approved Budget for the Contract | Price of Bid Documents | Delivery Period |
|--------|----------|---|----------------------------------|------------------------|-----------------|
| 1 | 163 | SUPPLY AND DELIVERY OF 9mm PISTOLS | Php 4,957,200.00 | 5,000.00 | 60 CD |


| FROM | TO |
|--|---|
| SECTION I. INSTRUCTION TO BIDDERS B. Preparation of Bids 1. Eligibility, Technical and Financial Documents Comprising the Bid A. Documents Comprising the Bid: Eligibility, Technical and Financial Components 3. Audited Financial Statements (AFS) for year 2015. 6. The following requirements: | SECTION I. INSTRUCTION TO BIDDERS B. Preparation of Bids 1. Eligibility, Technical and Financial Documents Comprising the Bid A. Documents Comprising the Bid: Eligibility, Technical and Financial Components 3. Audited Financial Statements (AFS) for year 2015, stamped "received" by BIR. 6. The following requirements: |

| | |
|-----------|--|
| 6.9 ----- | <p>6.9 The bid security in the form, amount and validity period of one hundred twenty (120) calendar days:</p> <p>The bid security shall be limited to Bid Securing Declaration, pursuant to GPPB Circular 01-2014 dated May 23,2014, and at least one (1) other form in accordance with the following amount:</p> <ol style="list-style-type: none"> 1. <i>2% of ABC</i>, if bid security is in cash, cashier's/manager's check, bank draft/guarantee or irrevocable letter of credit; 2. <i>5% of ABC</i> for Surety bond callable upon demand issued by a surety or insurance company duly certified by the Insurance Commission as authorized to issue such security. 3. Any combination of the foregoing proportionate to the share of form with respect to total amount of security. |
|-----------|--|

From:

| ITEM DESCRIPTION |
|---|
| <p>9mm Pistol</p> <p>Technical Specifications</p> <p><i>Frame: All steel or alloy or polymer</i> <i>Operation: Semi-auto, short recoil system</i> <i>Caliber: 9 x 19mm</i> <i>Trigger Mechanism: DA/SA (Double Action/SingleAction)</i> <i>Safety : As per manufacturer's specification</i> <i>Dimensions (all in mm):</i> <i> Total Length: 205 to 225</i> <i> Width : As per Manufacturer's specification</i> <i> Height : As per Manufacturer's specification</i> <i>Barrel: Preferably Button or Cut-Rifled Barrel or Cold Hammer Forged</i> <i> Barrel length : 110 to 124</i> <i>Magazine Capacity: 15 to 16+1</i> <i>Rifling : 6 grooves</i> <i>Sight : Combat type (fixed sights)</i> <i>With :</i> <i> Three (3) magazines</i> <i> One (1) cleaning brush</i> <i> One (1) Spare Recoil Spring</i> <i> Instructional manual</i> <i> Gun Case (hard plastic)</i> <i> 50 rounds ammo per pistol</i></p> <p><i>Inclusive : License fee</i> <i>Stress Test: (Ballistic test) Barrel and parts can withstand: 500 rounds non-stop firing per pistol (4 pistols randomly selected from the 16 samples)</i> <i>Drop Test: At least 3 meters in concrete or metal surface (all 16 samples)</i></p> |

BJMP Markings on Pistol

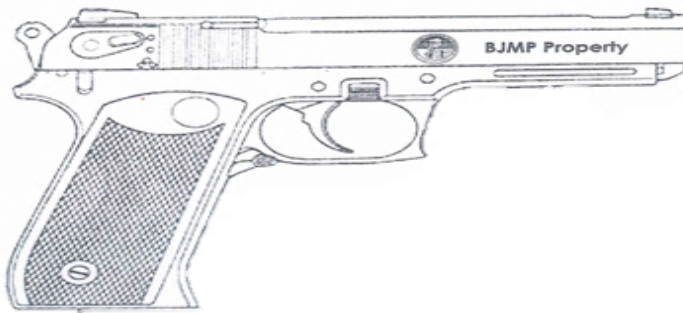

Must be able to fire: Underwater, or after submerging in water or after it was dipped or covered in mud or sand (5 samples randomly selected from the 16 samples, 10 rounds each)
Interoperable: all samples' parts must be interchangeable and interoperable
Engraved BJMP Marking

To:

ITEM DESCRIPTION

9mm Pistol
Technical Specifications

Frame: All steel or alloy or polymer
Operation: Semi-auto, short recoil system
Caliber: 9 x 19mm
Trigger Mechanism: DA/SA (Double Action/Single Action)
Safety: As per manufacturer's spec
Dimensions: (all in mm)

Total Length: 202 to 225
Width: As per Manufacturer's spec
Height: As per Manufacturer's spec


Barrel: Preferably Button or Cut-Rifled Barrel or Cold Hammer Forged
Barrel Length: 110 to 125
Magazine Capacity: 15 to 16 + 1
Rifling: 6 grooves
Sight: Combat type (fixed sights)

With:
Three (3) magazines
One (1) cleaning brush
Instructional manual
Gun case (hard plastic)

Inclusive: License fee

Engraved BJMP Marking:

BJMP Markings on Pistol

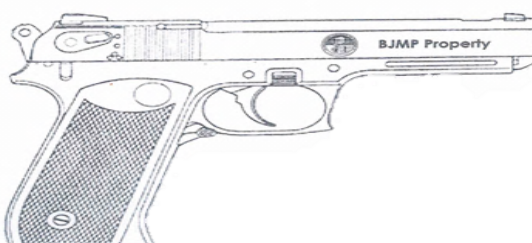

Winning Bidder:

1. Shall provide free ammunitions, lubricant for the different tests.
2. Shall provide platform for the drop test.
3. Shall provide other items (dram with water) needed or as appropriate during the testing.

Testing Parameters:

A. Stress Test: One (1) Pistol only, randomly picked (Serial Number, without BJMP Marking)

A.1 (Ballistic Test) Barrel , Slide, Hammer and Main Spring can withstand: 500 rounds in two (2) cycles:

1. Sample pistol shall fire 250 rounds (1st cycle).
2. After 250 rounds, pistols shall be disassembled, wiped or minimally cleaned and lubed.
3. Re-assemble the same pistol and shall fire another 250 rounds (2nd cycle).
4. After the 2nd cycle, pistol shall be disassembled again and shall be subjected to a thorough inspection of it's parts by the TWG.
5. The same sample pistol shall no longer be included in the Drop Test.

- > Please Note: Broken, Cracked, Deformed or Melted Barrel (slightly or pronounced) and Broken, Cracked, Deformed or Melted Slide (slightly or pronounced) shall be a ground for automatic disqualification. Replacement of the above stated parts is not a option.
- > Please Note: Broken Hammer, Trigger and Main Spring shall be a ground for automatic disqualification. Replacement of the above stated parts is not a option.
- > In a case when the pistol's Firing Pin was broken and/or recoil springrod was broken or melted down after the 500 rounds, the winning bidder shall only provide for a free of charge replacement prior to delivery. This is not a ground for disqualification because these parts are abundant and can be easily replaced.
- > However, in a case when the pistol's Firing Pin was broken and/or recoil springrod was broken or melted down in under 250 rounds it shall be an automatic ground for automatic disqualification.

B. Drop Test: One (1) Pistol only, randomly picked (Serial Number, without BJMP Marking)

1. Seven (7) feet falling on a hard surface, (asphalt or concrete), magazine inserted with dummy bullets, two (2) times: (for steel and alloy frame)
2. Five (5) feet falling on a hard surface, (asphalt or concrete), magazine inserted with dummy bullets, two (2) times: (for polymer frame)
3. Failure of drop test shall be an automatic ground for disqualification, it shall include the following parts;

- a. Broken, Cracked or Deformed Frame (slightly or pronounced)
- b. Deformed Trigger Guard (pronounced and irreparable)
- c. Broken, Cracked or Deformed Slide (slightly or pronounced)
- d. Broken or Cracked Barrel (slightly or pronounced)
- e. Broken Trigger
- f. Broken Main Spring
- g. Other Important Parts

Exemptions: Grips, Sights, Spring, Recoil Spring Rod, Firing Pin, Magazine

- > Please Note: Replacement of any of the above stated parts of the Pistol (para (3) letters (a to f) is not a option or allowed.
- > Please Note: Other important parts not specifically identified and named under paragraph (3) letter (g) which will affect 100% functionality of the Pistol when fired after the drop test is not a option or allowed.
- > The Pistol shall perform 100% after the Drop Test. (Load, Eject and Fire continuously without any problem)
- > Broken parts under Exemptions, is not a ground for disqualification because these parts are abundant and can be easily replaced. However, the winning bidder shall provide for a free of charge replacement prior to delivery.

>

Procedure of the Drop Test:

a. On top of a 7 feet or a 5 feet platform (depending on the frame) shall be at the test site where the pistol will be placed.

b. Using a stick or other material, the pistol shall be pushed until it falls on the asphalt or concrete. Representative of the winning bidder shall do the honor while the TWG will observe the procedure.

Procedure After Drop Test:

a. After the drop test, pistol shall be disassembled again and shall be subjected to a thorough inspection of its parts by the TWG.

b. Assemble Pistol and shall be able to fire 16 rounds of ammo continuously without any problem.

C. Must be able to fire: One (1) Pistol only, randomly picked and has not been subjected to any other test (Serial Number without BJMP Marking)

1. Underwater test: Magazine inserted with twelve (12) round ammos.. Maximum of two (2) rounds shall be fired underwater.

2. Right after it was fired underwater, immediately while dripping and without wiping the pistol, all remaining ten (10) rounds in its magazine shall be fired contineously.

3. After which, pistol shall be disassembled and shall be subjected to a thorough inspection of its parts by the TWG.

4. Failure of the preceeding tests shall be an automatic ground for disqualification, it shall include the following;

- > a. The Pistol was broken while firing underwater.
- > b. The Pistol was broken while firing immediately, (still dripping and without wiping) the remaining ten (10) rounds of ammo in its magazine after firing under water.
- > c. Unable to Load, Eject and Fire continuously after firing underwater. This shall be observed three (3) times only.

D. Inter-operability: At least five (5) Pistols, randomly picked (Serial Number, without BJMP Marking)

1. Parts (those usually removed) must be interchangeable: slide, barrel, recoil spring rod and magazines.

2. Parts (those usually removed) must be interoperable, slide, barrel , recoil spring rod and magazines and be able to fire at least ten (10) rounds without failure.

ACCEPTANCE TEST:

1. The same number of Pistols shall be put to the same tests and parameters (Post Qual) during the acceptance.

2. Different pistols shall be randomly picked. (Pistols undergone Post Qual test shall be EXCLUDED).

3. All pistols during the acceptance test shall bear the BJMP Marking.

From:

TECHNICAL BID FORM

TO THE BIDDER: Indicate **“COMPLY”** if proposal meets the technical specifications and project requirements. **“NO BID”** if not bidding on the particular lot. DO NOT LEAVE ANY BLANK. A **“YES OR NO”** ENTRY WILL NOT BE ACCEPTED. FAILURE TO CONFORM WILL RESULT IN A RATING OF **“FAILED”**.

| Lot | Qty | Required Specification | Bidder's Proposal | |
|-----|-----|---|--|--|
| 1 | 163 | Cal 9mm Pistol | | |
| | | Frame | <i>All steel or alloy or polymer</i> | |
| | | Operation | Semi-auto, short recoil system | |
| | | Caliber | 9 x 19mm | |
| | | Trigger Mechanism | DASA (Double Action/ Single Action) | |
| | | Safety | As per manufacturer's specification | |
| | | Dimension (mm) | | |
| | | Total Length | 205 to 225 | |
| | | Total Width | As per manufacturer's specification | |
| | | Height | As per manufacturer's specification | |
| | | Barrel | Preferably Button or Cut Rifled Barrel or Cold Hammer Forged | |
| | | Barrel Length | 110 to 124 | |
| | | Magazine Capacity | 15 to 16+1 | |
| | | Rifling | 6 Grooves | |
| | | Sight | Combat Type (fixed sights) | |
| | | With | | |
| | | Three (3) magazines | | |
| | | One (1) cleaning brush | | |
| | | One (1) Spare Recoil Spring | | |
| | | Instruction Manual | | |
| | | Gun Case (Hard plastic) | | |
| | | Inclusive - License Fee | | |
| | | Stress Test: (Ballistic test) Barrel and parts can withstand: 500 rounds non-stop firing per pistol (4 pistols randomly selected from the samples) | | |
| | | Drop Test: At least 3 meters in concrete or metal surface (all 16 samples) | | |
| | | Must be able to fire: Underwater, or after submerging in water or after it was dipped or covered in mud or sand (5 samples randomly selected from the 16 samples, 10 rounds each) | | |
| | | Interoperable: all samples' parts must be interchangeable and interoperable | | |
| | | Engraved BJMP Markings | | |

To:

TECHNICAL BID FORM

TO THE BIDDER: Indicate **“COMPLY”** if proposal meets the technical specifications and project requirements. **“NO BID”** if not bidding on the particular lot. DO NOT LEAVE ANY BLANK. A **“YES OR NO”** ENTRY WILL NOT BE ACCEPTED. FAILURE TO CONFORM WILL RESULT IN A RATING OF **“FAILED”**.

| Lot | Qty | Required Specification | Bidder's Proposal |
|-----|-----|------------------------|-------------------|
|-----|-----|------------------------|-------------------|

| | | | | |
|----------|------------|---|--|--|
| 1 | 163 | Cal 9mm Pistol | | |
| | | Frame | <i>All steel or alloy or polymer</i> | |
| | | Operation | Semi-auto, short recoil system | |
| | | Caliber | 9 x 19mm | |
| | | Trigger Mechanism | DASA (Double Action/ Single Action) | |
| | | Safety | As per manufacturer's specification | |
| | | Dimension (mm) | | |
| | | Total Length | 202 to 225 | |
| | | Total Width | As per manufacturer's specification | |
| | | Height | As per manufacturer's specification | |
| | | Barrel | Preferably Button or Cut Rifled Barrel or Cold Hammer Forged | |
| | | Barrel Length | 110 to 125 | |
| | | Magazine Capacity | 15 to 16+1 | |
| | | Rifling | 6 Grooves | |
| | | Sight | Combat Type (fixed sights) | |
| | | With | | |
| | | Three (3) magazines | | |
| | | One (1) cleaning brush | | |
| | | Winning Bidder: | | |
| | | <ol style="list-style-type: none"> 1. Shall provide free ammunitions, lubricant for the different tests. 2. Shall provide platform for the drop test. 3. Shall provide other items (dram with water) needed or as appropriate during the testing. | | |
| | | Instruction Manual | | |
| | | Gun Case (Hard plastic) | | |
| | | Inclusive - License Fee | | |
| | | Testing Parameters: | | |
| | | <p>A. <u>Stress Test</u>: One (1) Pistol only, randomly picked (Serial Number, without BJMP Marking)</p> <p>A.1 (Ballistic Test) Barrel , Slide, Hammer and Main Spring can withstand: 500 rounds in two (2) cycles:</p> <ol style="list-style-type: none"> 1. Sample pistol shall fire <u>250 rounds</u> (1st cycle). 2. After 250 rounds, pistols shall be disassembled, wiped or minimally cleaned and lubed. 3. Re-assemble the same pistol and shall fire another <u>250 rounds</u> (2nd cycle). 4. After the 2nd cycle, pistol shall be disassembled again and shall be subjected to a thorough inspection of it's parts by the TWG. 5. The same sample pistol shall no longer be included in the Drop Test. <p>➤ <u>Please Note</u>: Broken, Cracked, Deformed or Melted Barrel (slightly or pronounced) and Broken, Cracked, Deformed or Melted Slide (slightly or pronounced) shall be a ground for automatic disqualification. Replacement of the above stated parts is not a option.</p> <p>➤ <u>Please Note</u>: Broken Hammer, Trigger and Main Spring shall be a ground for automatic disqualification. Replacement of the above stated parts is not a option.</p> <p>➤ <u>In a case when the pistol's Firing Pin was broken and/or recoil springrod was broken or melted down after the 500 rounds, the winning bidder shall only provide for a free of charge replacement prior to delivery. This is not a ground for disqualification because these parts are</u></p> | | |

abundant and can be easily replaced. However, in a case when the pistol's Firing Pin was broken and/or recoil springrod was broken or melted down in under 250 rounds it shall be an automatic ground for automatic disqualification.

B. Drop Test: One (1) Pistol only, randomly picked (Serial Number, without BJMP Marking)

1. Seven (7) feet falling on a hard surface, (asphalt or concrete), magazine inserted with dummy bullets, two (2) times: (for steel and alloy frame)

2. Five (5) feet falling on a hard surface, (asphalt or concrete), magazine inserted with dummy bullets, two (2) times: (for polymer frame)

3. Failure of drop test shall be an automatic ground for disqualification, it shall include the following parts:

a. Broken, Cracked or Deformed Frame (slightly or pronounced)

b. Deformed Trigger Guard (pronounced and irreparable)

c. Broken, Cracked or Deformed Slide (slightly or pronounced)

d. Broken or Cracked Barrel (slightly or pronounced)

e. Broken Trigger

f. Broken Main Spring

g. Other Important Parts

Exemptions: Grips, Sights, Spring, Recoil Spring Rod, Firing Pin, Magazine

- Please Note: Replacement of any of the above stated parts of the Pistol (para (3) letters (a to f) is not a option or allowed.
- Please Note: Other important parts not specifically identified and named under paragraph (3) letter (g) which will affect 100% functionality of the Pistol when fired after the drop test is not a option or allowed.
- The Pistol shall perform 100% after the Drop Test. (Load, Eject and Fire continuously without any problem)
- Broken parts under Exemptions, is not a ground for disqualification because these parts are abundant and can be easily replaced. However, the winning bidder shall provide for a free of charge replacement prior to delivery.
-

Procedure of the Drop Test:

a. On top of a 7 feet or a 5 feet platform (depending on the frame) shall be at the test site where the pistol will be placed.

b. Using a stick or other material, the pistol shall be pushed until it falls on the asphalt or concrete. Representative of the winning bidder shall do the honor while the TWG will observe the procedure.

Procedure After Drop Test:

a. After the drop test, pistol shall be disassembled again and shall be subjected to a thorough inspection of it's parts by the TWG.

b. Assemble Pistol and shall be able to fire 16 rounds of ammo continuously without any problem.

C. Must be able to fire: One (1) Pistol only, randomly picked and has not been subjected to any other test (Serial Number without BJMP Marking)

1. Underwater test: Magazine inserted with twelve (12) round ammos.. Maximum of two (2) rounds shall be fired underwater.
2. Right after it was fired underwater, immediately while dripping and without wiping the pistol, all remaining ten (10) rounds in it's magazine shall be fired continuously.
3. After which, pistol shall be disassembled and shall be subjected to a thorough inspection of its parts by the TWG.
4. Failure of the preceding tests shall be an automatic ground for disqualification, it shall include the following;

- a. The Pistol was broken while firing underwater.
- b. The Pistol was broken while firing immediately, (still dripping and without wiping) the remaining ten (10) rounds of ammo in it's magazine after firing under water.
- c. Unable to Load, Eject and Fire continuously after firing underwater. This shall be observed three (3) times only.

D. Inter-operability: At least five (5) Pistols, randomly picked (Serial Number, without BJMP Marking)

1. Parts (those usually removed) must be interchangeable: slide, barrel, recoil spring rod and magazines.
2. Parts (those usually removed) must be interoperable, slide, barrel , recoil spring rod and magazines and be able to fire at least ten (10) rounds without failure.


ACCEPTANCE TEST:

1. The same number of Pistols shall be put to the same tests and parameters (Post Qualification) during the acceptance.
2. Different pistols shall be randomly picked. (Pistols undergone Post Qualification test shall be EXCLUDED).
3. All pistols during the acceptance test shall bear the BJMP Marking.

Engraved BJMP Markings

This Bid Bulletin No. 1 shall form part of the Bid Documents. Any provision in the issued bid documents inconsistent herewith is hereby amended, modified and superseded accordingly.

Issued this 5th day of August 2016 at BJMP National Headquarters, 144 Mindanao Avenue, Quezon City.

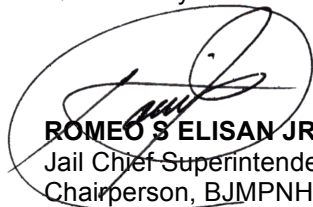

ROMEO S. ELISAN JR., MPA
Jail Chief-Superintendent
Chairperson, BJMPNHQ-BAC